
Grace


Technical specification

1 **Seat, backrest** - moulded foam, flame retardant, density of 65 kg/m3, upholstered
2 **Base** - oval-shaped profile 40 × 20 × 2 mm, tube Ø22 mm, wall thickness 2 mm, CNC-bent, powder coated
3 **Legs** - finished with material feet, colour: black

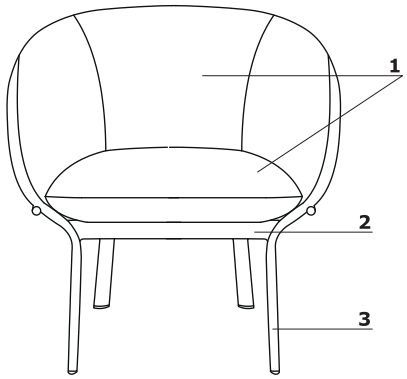


Maximum load is 120 kg.


Dimensions (mm)

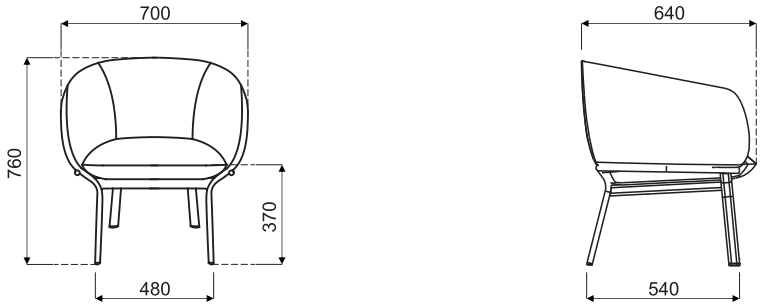

GR01

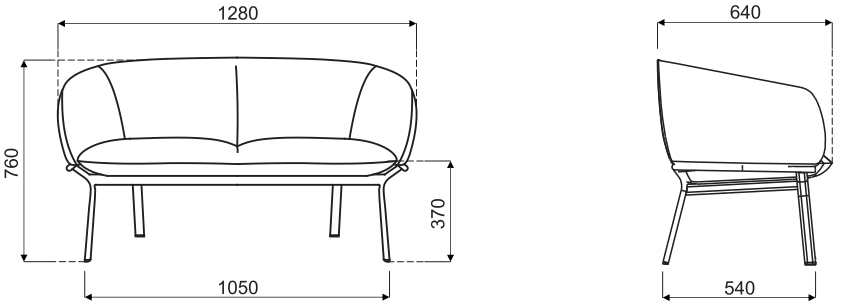

GR02

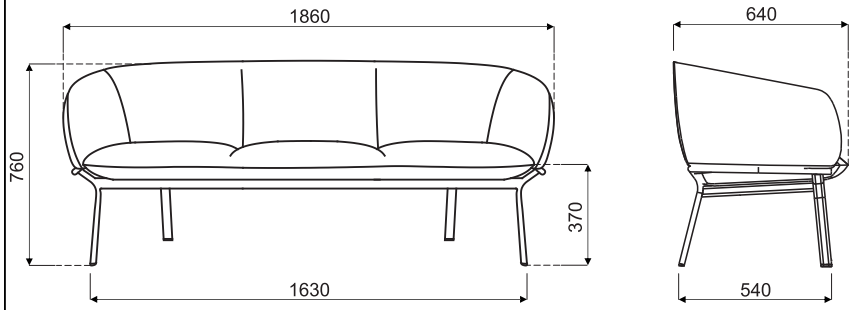


GR03

mdd.eu


.mdd


Technical specification - tables

1 **Top** - MDF 19mm, natural veneer
2 **Frame** - oval-shaped profile 40 × 20 × 2 mm, tube Ø22 mm, wall thickness 2 mm, CNC-bent, powder coated

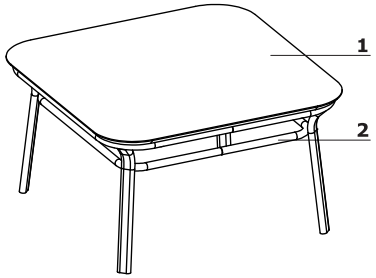

Dimensions (mm)

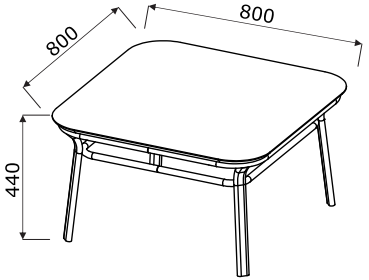

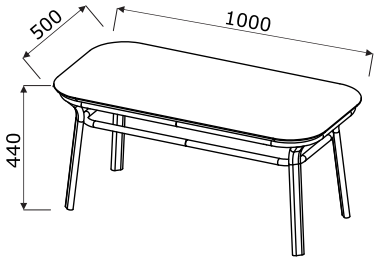

Chairs - bases

Seat, backrest - moulded foam, flame retardant (seat - density of 58 kg/m3, backrest - density of 60 kg/m3), upholstered

Base GRP19:
- 4 - star, aluminum, powder coated
- swivel seat - 360°
- aluminium cast
- legs finished with polypropylene feet
- OPTION WITH EXTRA CHARGE - polished aluminium

Base GRP19K:
- 4 - star, aluminum, powder coated
- swivel seat - 360°
- aluminium cast
- castors for soft floors
- OPTION WITH EXTRA CHARGE - castors for hard floors
- OPTION WITH EXTRA CHARGE - polished aluminium

Base GRP5:
- 4 - legged, metal, powder coated
- legs made of tube Ø18 mm
- legs finished with polypropylene feet

Base GRP10:
- wooden legs - screw-in, Ø38 mm
- beechwood coated with transparent varnish

GRP22:
- 5 - star, aluminum, Ø=630 mm, h=360 mm, powder coated
- swivel seat - 360°
- tilt mechanism with a lock
- gas spring, steel, colour: black, adjustment range 120 mm (450 - 570 mm)
- castors for soft floors
- OPTION WITH EXTRA CHARGE - castors for hard floors

GRP19



GRP19K



GRP5



GRP10




GRP22




Maximum load is 120 kg.


Dimensions (mm)

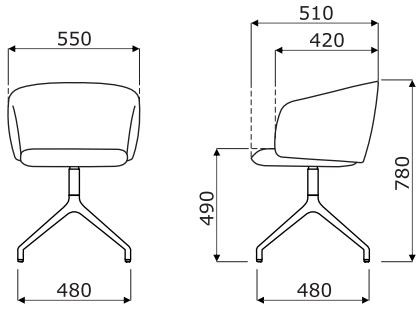


GRP19

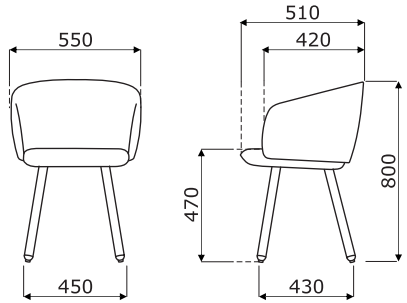

GRP10

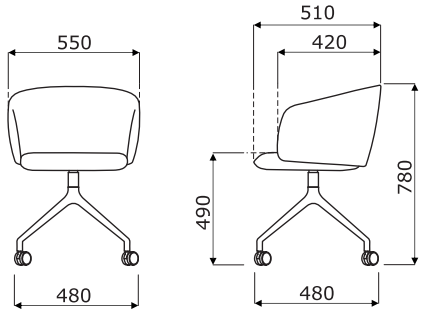

GRP19K

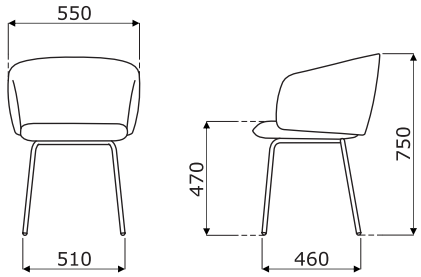


GRP5

Technical specification - high stool

1 Seat, backrest - moulded foam, flame retardant (seat - density of 58 kg/m3, backrest - density of 60 kg/m3), upholstered

2 Base:

- 4 - legged, metal, powder coated
- legs made of tube Ø18 mm
- legs with glides

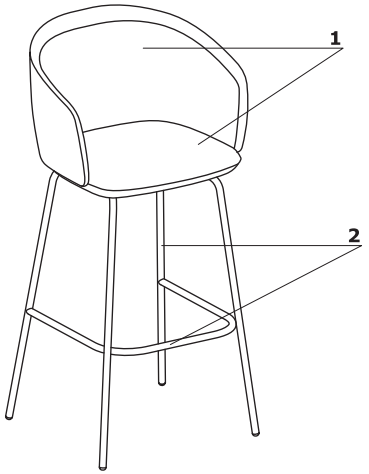

Maximum load is 120 kg.

Dimensions (mm) - high stool

