


## Worktop

- 1 Worktop** - MFC 1 1/8" (28 mm), ABS edge  
1/8" (2 mm)


**OPTIONS WITH EXTRA CHARGE:**

- 2 Grommet** - 2 pcs, Ø3 1/8" (Ø80 mm)  
**3 Mediabox M071** - 1 x 230V + USB A charger + USB C charger, colour: black, white, mounted instead of the existing grommet Ø80mm (PK80)  
**4 Top access M15** - 3 x USB C  
**5 Cable way** - the width of the opening is proportional to the width of the worktop

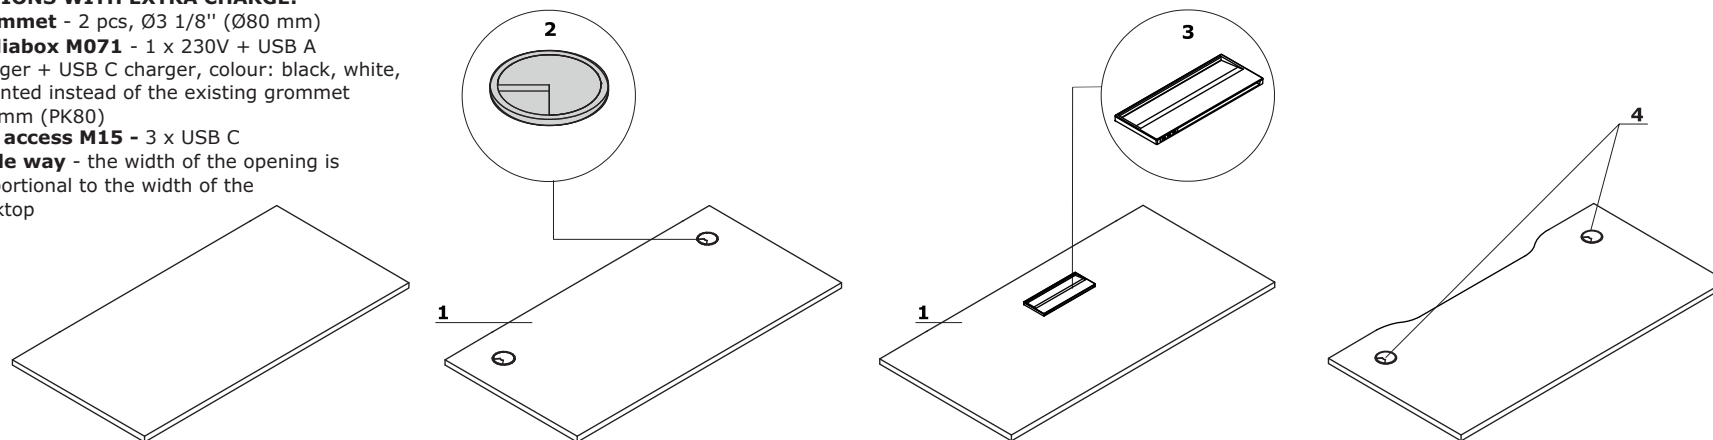

## Frame


- 1 Ogi Drive with electric height adjustment** - in the range of 25 5/8" - 51 1/8" (650 - 1300 mm), metal, powder coated, 3 profiles 2" x 2" (50 x 50 mm), 2 1/8" x 2 1/8" (55 x 55 mm) and 2 3/8" x 2 3/8" (60 x 60 mm)  
**2 Ogi Drive with electric height adjustment** - in the range of 27 4/8" - 47 2/8" (700 - 1200 mm), metal, powder coated, 2 profiles 2 1/8" x 2 1/8" (55 x 55 mm) and 2 3/8" x 2 3/8" (60 x 60 mm)  
**3 Ogi Drive with manual height adjustment** - metal, powder coated, 2 profiles 2" x 2" (50 x 50 mm) i 2 3/8" x 2 3/8" (60 x 60 mm), adjustment in the range of 25 5/8" - 38 3/8" (650 - 1000 mm)  
**Foot:**  
**4 Basic** - powder coated metal  
**5 Pro** - aluminum, powder coated (104 \$/ 2 pcs):  
 •polished aluminum (94 \$/ 2 pcs)

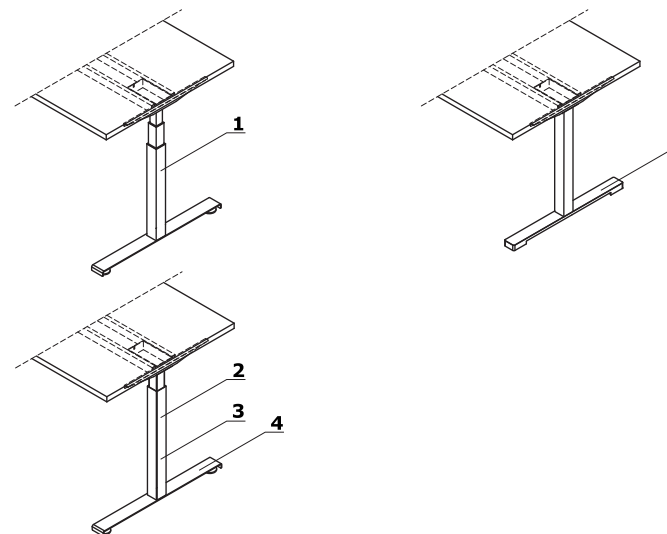




**Electric height adjustable frame - Ogi Drive**

**Frame technical specification**

- 1 Worktop** - MFC 1 1/8" (28 mm), ABS edge 1/8" (2 mm)
- 2 ZD Panel** - acoustic class A, zip fastener, pinable
- 3 Fixing element** - powder coated metal
- 4**
- 5 Leveling feet** - range 2/8" (5 mm)
- 6 Control panel** - stepless height adjustment:
  - A** - basic control panel; the sensitivity of the anti-collision system is set to Medium
  - B** - OPTION WITH EXTRA CHARGE - up and down keypad with memory; the ability to change the sensitivity of the anti-collision system within 3 levels: Low, Medium, High
  - C** - OPTION WITH EXTRA CHARGE - round control panel with memory; the ability to change the sensitivity of the anti-collision system within 3 levels: Low, Medium, High; mounted to the worktop
- 7 Electric height adjustable frame** - powder coated steel, load 100 kg, telescopic leg

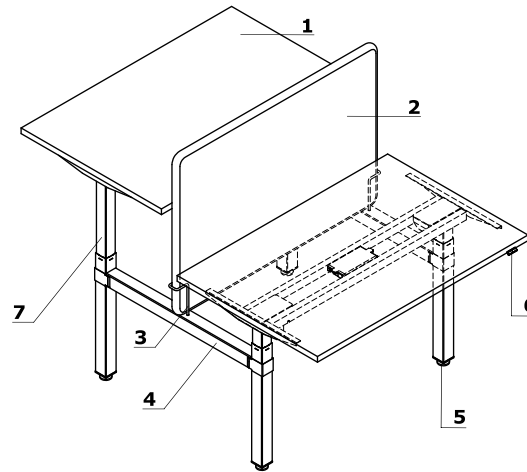

- **Height adjustment** - 1 5/8" (40 mm) /sec
- Super Soft Start - Stop
- **Drive** - 2 synchronised motors with microprocessor, work control sensor
- **Noise level** - < 48dB
- **Anti collision mechanism**
- **Standards** - EN 527-2
- **EU Directives 206/95EC, UI508 1999, UL 1004 R7 06, WE DC 2004/108WE**
- **Power supply** - 110V, 300W, power consumption on Standby - 0.3W



## Electric frame with common cable tray - Ogi Drive

**1 Worktop** - MFC 1 1/8" (28 mm), ABS edge  
1/8" (2 mm)

**2 Electric height adjustable frame** -  
powder coated steel, load 100 kg, telescopic  
leg

**3 Common cable tray + vertical cable  
organizer**


**5 Leveling feet** - range 2/8" (5 mm)

**6 Control panel** - stepless height  
adjustment:

**A** - basic control panel; the  
sensitivity of the anti-collision system is set to  
Medium

**B** - OPTION WITH EXTRA CHARGE - up and  
down keypad with memory; the ability to  
change the sensitivity of the  
anti-collision system within 3 levels: Low, Medium,  
High

**C** - OPTION WITH EXTRA CHARGE - round  
control panel with memory; the ability to  
change the sensitivity of the  
anti-collision system within 3 levels: Low,  
Medium, High; mounted to the worktop

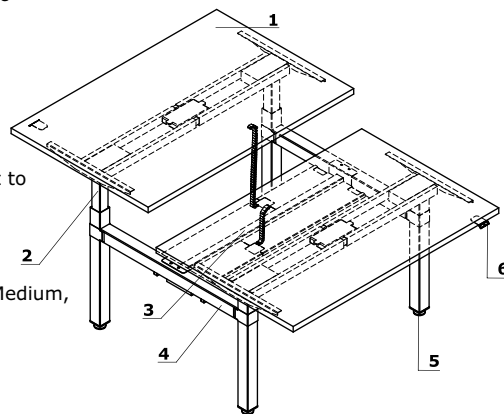


## Mediabox location

**brak**

**brak**

**C** - right mediabox

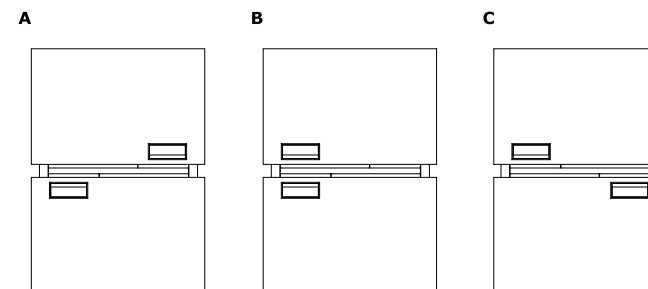

## Hand crankframe - Ogi Drive

**1 Worktop** - MFC 1 1/8" (28 mm), ABS edge  
1/8" (2 mm)

**2 ZD Panel** - acoustic class A, zip  
fastener, pinable

**3 Fixing element** - powder coated metal

**4**

**5 Leveling feet** - range 2/8" (5 mm)

**6 Hand crank** - hidden handle, colour:  
black, stepless adjustment in the range  
of 25 5/8" - 39 3/8" (650 - 1000 mm),  
rotation 1/8" (2,25 mm), profiles 2 3/8"  
x 2 3/8" (60 x 60 mm), 2" x 2" (50 x 50  
mm)

