



## Technical specification

- 1 Seat** - moulded foam, density of 2 5/8" (66 kg/m<sup>3</sup>), 2 1/8" (55 mm) thick; upholstered, sliding
- 2 Backrest** - mesh in Runner colours
- 3 Mechanism** - Auto Synchro; OPTION WITH EXTRA CHARGE - Synchro Pro
- 4 Base** - 5-star, polypropylene, Ø=26 6/8" (680 mm), h=4 7/8" (124 mm); OPTION WITH EXTRA CHARGE - 5-star, polished aluminum, Ø=26 6/8" (680 mm), h=4 7/8" (124 mm)
- 5 OPTION WITH EXTRA CHARGE** - headrest - black mesh
- 6 OPTIONS WITH EXTRA CHARGE:**
  - armrest 2D - V3 - polyurethane, colour: black
  - armrest 3D - V3 - polyurethane, colour: black
- 7 OPTION WITH EXTRA CHARGE** - manual height adjustable 2 3/8" (60 mm) lumbar support
- 8 Castors** - Ø 2 4/8" (Ø 65 mm), for soft floors PP+PA, color: black; OPTION WITH EXTRA CHARGE - for hard floors PP+PA, color: black
- 9 Actuator** - steal gas spring, adjustment range 3 7/8" (100 mm), color: chrome or black

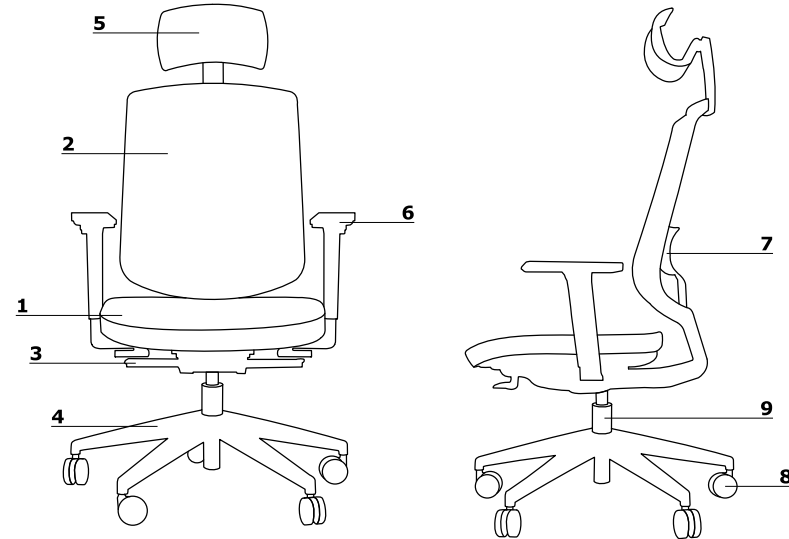

- max. load 120 kg


## Dimensions (inch/mm)

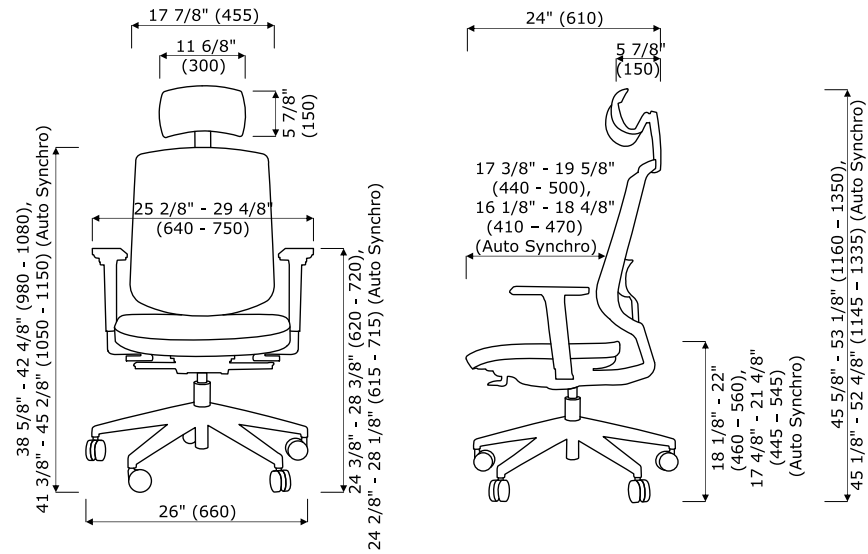

## Mechanism


### AUTO SYNCHRO

- synchronized automated regulation chair back press mechanism
- designed for usage 45 and 120kg
- allows the backrest to tilt from 0° to 18° and the seat to tilt from 0° to 4,5° at the same time
- it is possible to lock the backrest only in the 0° position
- seat depth adjustment range 3 7/8" (100 mm), possibility to lock in 11 different positions



### SYNCHRO PRO

- tilt angle of the backrest 25° and the seat 10°
- designed for usage 45 and 120kg
- additional front seat tilt incl. back of 3°
- 3 blocking positions of the backrest
- Anti - shock system
- adjustment of lateral tension
- seat depth adjustment range 3 7/8" (100 mm), possibility to lock in 11 different positions



## Armrests

### 1 Adjustable armrest - 2D-V3

- width adjustment (A)
- height adjustment (B)

### 2 Adjustable armrest - 3D-V3

- width adjustment (A)
- height adjustment (B)
- depth adjustment (width adjustment inwards) (C)

